


TOA BS-1030B



30W UNIVERSAL BOX SPEAKER

The **BS-1030W** is a small, 2-way bass-reflex type speaker featuring a wide frequency range suitable for use for announcements and music playback. The BS-1030W can be used for both high-impedance and low-impedance applications. The speaker's splash-proof construction permits it to be installed under the eaves where the speaker is not directly exposed to rain.

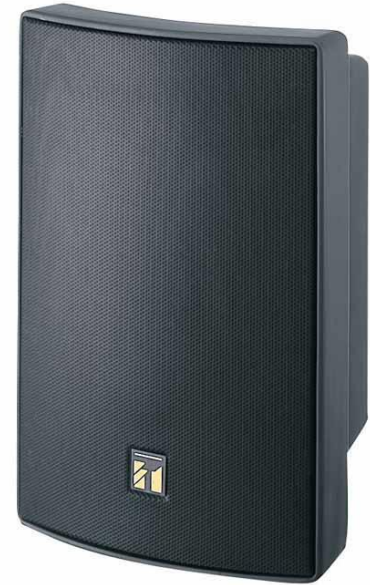

Specification:

Enclosure	2-way bass-reflex type
Rated Input	30 W
Rated Impedance	8 Ω 100 V line: 330 Ω (30 W), 500 Ω (20 W), 670 Ω (15 W), 1 k Ω (10 W), 2 k Ω (5 W)
Sound Pressure Level	90 dB (1 W, 1 m)
Frequency Response	80 Hz - 20 kHz
Speaker Component	12 cm cone-type + dome-type
Speaker Cord	2-core cabtyre cord with diameter of 6 mm
Operating Temperature	-10 °C to +50 °C
Water Protection	IPX4 (can be installed vertically or horizontally.*)
Finish	Enclosure: ABS resin, white (RAL9010 PURE WHITE) paint Net: Surface treated steel plate, white (RAL9010 PURE WHITE), powder coating Bracket: Surface treated steel plate, white equivalent to RAL9010 PURE WHITE, powder coating
Dimension	196 (W) × 290 (H) × 150 (D) mm (unit only)
Weight	2.5 kg