### MR1301 EVAC Message Player / Voice Recorder MK II





MR1301 - EVAC Voice Message player has been further upgraded, notably the way the unit shall be setup. LAN port has been added to enable configuration to be performed smoothly using web interface with user friendly GUI. Tasks such as uploading of files, combining or grouping messages, key assignments shall all be done via web browser or the front button keys.

As one of the most important equipment in EVAC, MR1301 MK II shall perform beyond expectation by providing precise message delivery and clarity, to enable timely and systematic evacuation procedures in time of distress. Apart from the above application, it can also be used as general message player such as prayer playback, voice recording and other usages as required.

		Message Library			E
		Q, Rharby care.			& ecces
		BRLETE BRLECTER			
Message Con	figuration	Titesens +	Sale Modified	Duration	<b>Artist</b>
MERCENT.	Configure Microsope Button 1	Annald	16/86/21 18/57 14	49.1H	3.0 ±
HE0 40Y 1	(	Date	18/86/27 12/87/80	02.05	50 ± 2
MERCENTS	1 Cheese * 8	Databat	16/06/21 10:01:00	00.37	n# 12
NUMBER OF STREET	2 5 mm x 20	D Poster	16/06/27 12:56.44	0217	
1000-007-0	Destry ()	Treastadene of T		factors per page	10 - 1041
1000 NCV 7	Latera	► #0.45 00.15 Aber07	fitme (tente int bieterten	fo (010 (010 01-100 Charmon	en finte
1000 1071	Postlart	Strape Steel 2.44 MB / 14.40 GB			
MERINEY 18	Kamoti Drime				
MODE NOT TO					
MEDIATY 18 MEDIATY 14 MEDIATY 18	ADD DOLLAR AND HEREINAG			Better user expo with user friendl	

# **Technical Specifications**

Operating voltage	24V DC ; 1A		
Power consumption	2.4 (0.1 A)		
Standby consumption	1.7 W ( 0.07 A )		
Data connection	RS485 : Mini Phoenix connector, 19.2 kbps		
	LAN : RJ45, 10/100 Base T		
Inputs	Line in ; Unbalanced via RCA jack		
	Mic in (recording): 1/4" balanced phone jack		
Message trigger	16 memory banks : Front and rear		
Playback format	MP3, WAV		
Voice recording	MP3, 1 hour per message		
Playback delay	Yes		
Priority message cut	Yes		
Software interface	Google Chrome, Edge		
Remote view / control	Yes		
Indicators	LED, 2x18 Char LCD		
Memory	32 GB non detachable SD card		
Dimensions (W x H X D )	482 x 44 x 180 mm		
Weight	2.0 kg		


#### Packing information

Carton size : 555 (L) x 295 (W) x 95 (H) mm Gross weight : 2.55 kg 1 unit per carton

### **Features**

- Up to 32 GB of memory space for large file storage and recording
- Web technology with user friendly GUI for setup, upload files and configurations
- Message playback via front button / rear remote triggering
- High quality MP3 audio playback of up to 320 kbps with 64 kbps IMA ADPCM voice recording
- Flexible message configuration in every memory bank, ie. multiple files in single button with delay setting in between
- Flexible message playback sequencing
- Event logging with time stamp for every message played, triggered and powering
- Built in 5 band equaliser
- File / setting back up and restore
- Simple firmware updates

# **Application Schematic**

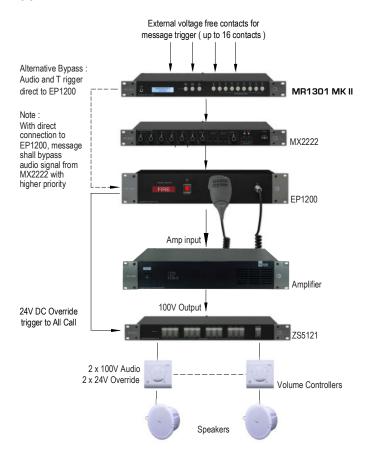

www.ampereselectronics.com